


Base unit pull-out

Full extension with self and soft closing mechanisms



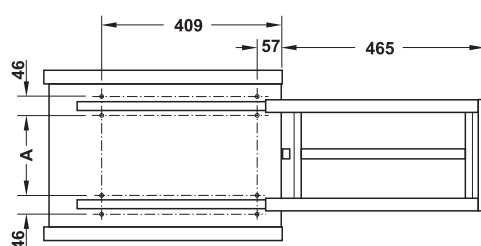

Pull-out frame with front brackets



- Material: Steel
- Finish/colour: Plastic coated, white aluminium, RAL 9006
- Load bearing capacity: 40 kg
- Version: Height adjustable
- Installation: For screw fixing to base
- Internal cabinet height: 630 mm
- Internal cabinet depth: 500 mm
- Internal width: Cabinet width – 40 mm

Suggested hanging basket configuration:

	For cabinet width mm	Hanging basket	Dim. (W x D x H) mm	Page
 Classic	300	1 x 546.75.243	250 x 462 x 106	FF 6.29
		3 x 545.60.275	110 x 470 x 88	FF 6.20
	400	1 x 546.75.244	350 x 462 x 106	FF 6.29
		3 x 545.60.276	160 x 470 x 88	FF 6.20
 Style	450	1 x 546.75.255	400 x 464 x 93	FF 6.29
		3 x 545.60.378	185 x 470 x 75	FF 6.20
	500/550	1 x 546.75.256	450 x 464 x 93	FF 6.29
		3 x 545.60.379	210 x 470 x 75	FF 6.20
	600	1 x 546.75.257	550 x 464 x 93	FF 6.29
		3 x 545.60.380	260 x 470 x 75	FF 6.20

Supplied with

- 1 Pull-out frame
- 2 Runners with integrated soft closing mechanism
- 1 Set of front brackets
- 1 Set of installation instructions

For cabinet width mm	Dim. A mm	Cat. No.
300 – 450	128	545.70.910
500 – 600	320	545.70.911

Packing: 1 piece

Order reference



Please order hanging baskets and hook-in shelves separately.


Hanging basket, narrow	► FF 6.19
Hook-in shelf, narrow	► FF 6.20
Hanging basket or hook-in shelf, wide	► FF 6.29

Base unit pull-out with wire baskets


For cabinet height from 600 mm,
full extension with self closing mechanism



- Material: Steel
- Finish: Pull-out: Plastic coated, white aluminium RAL 9006, hanging baskets: Chrome plated

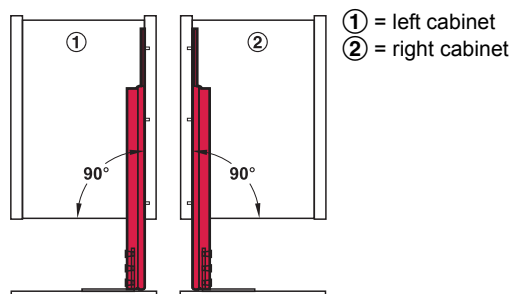

Base unit pull-out, straight version (90°)

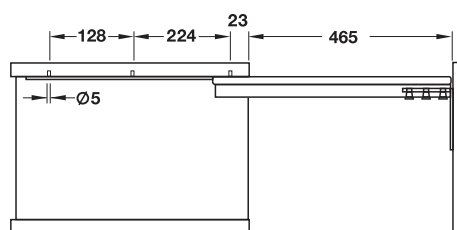

Left cabinet

→ Pull-out frame with 2 baskets



- Load bearing capacity: 24 kg
- Type of pull-out: Full extension
- Dim.: 38 x 470 mm (W x D)
- Version: With catch for front brackets
- Internal cabinet width: Basket width + 33 mm
- Internal cabinet depth: 490 mm
- Installation: For screw fixing to cabinet side panel

Supplied with

- 1 Pull-out frame, full extension
- 2 Front brackets
- 2 Hanging baskets
- 1 Set of installation instructions

Angle	Suitable for	Cat. No.
90°	Right cabinet	545.57.200
	Left cabinet	545.57.201

Packing: 1 piece

→ Hanging basket, separate

For base unit pull-out



- Material: Steel
- Finish: Chrome plated
- Dim.: 228 x 467 x 74 mm (W x D x H)

Angle	Suitable for	Cat. No.
90°	Right or left cabinet	545.57.290

Packing: 1 piece

Larder unit internal pull-out with door shelf and hanging baskets

Vitaflex


For installation behind hinged doors




6

Kitchen Cabinet Fittings

- Material: Pull-out frame, door shelf and hanging baskets: Steel, shelf: Chipboard
- Finish/colour: Pull-out frame: Plastic coated, white aluminium RAL 9006, door shelf and hanging baskets: Chrome plated, shelf: With non-slip effect, white
- Load bearing capacity: For cabinet width 450/500 mm: 50 kg pull-out shelf, 20 kg door shelf, for cabinet width 600 mm: 60 kg pull-out shelf, 25 kg door shelf
- Version: With integrated soft closing mechanism
- Internal cabinet width: Cabinet width – 38 mm
- Internal cabinet depth: min. 500 mm
- Mounting: For left and right hand use

Supplied with

- 1 Pull-out frame
- 1 Door shelf with fixed baskets
- 1 Basket set:
- 6 Baskets/shelves with 1700 mm,
- 4 Baskets/shelves with 1100 mm,
- 3 Baskets/shelves with 800 mm
- 1 Set of installation instructions

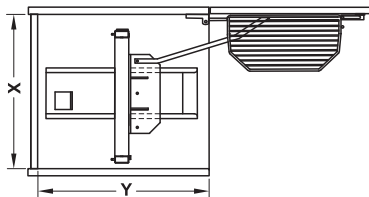

Dim. Y = min. 500 mm internal cabinet depth,
dim. X = internal cabinet width



Cabinet width mm	Internal installation height mm	Wire basket	Classic	Style
450	1700	545.94.201	545.94.211	–
500	1700	545.94.203	545.94.213	–
600	800	545.94.208	545.94.218	545.94.318
	1100	545.94.204	545.94.214	545.94.314
	1700	545.94.207	545.94.217	545.94.317


Packing: 1 piece



Larder unit internal pull-out with wire baskets

For installation behind hinged doors, with door shelf and hanging baskets

Vitaflex

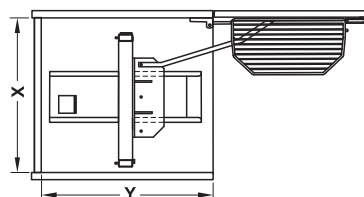

X = internal cabinet width
Y = internal cabinet depth



Right hand side version



6

- Material: Steel
- Finish: Pull-out frame: Plastic coated white aluminium, RAL 9006, door shelf and hanging baskets: Chrome plated
- Internal cabinet width: ≥ 412 mm
- Internal cabinet depth: ≥ 500 mm
- Mounting: Left hand or right hand
- Installation: Pull-out shelf for screw fixing to right side panel and base panel, door shelf can be mounted on the left or right hand side
- Load bearing capacity: 50 kg

Supplied with

- 1 Pull-out frame with follower
- 1 Door shelf with 6 fixed hanging baskets
- 6 Baskets
- 1 Set of installation instructions

Internal installation height mm	For cabinet width mm	Cat. No.
≥ 1700	450	546.61.202

Packing: 1 piece

→ Soft closing mechanism



- Material: Plastic

Supplied with

- 1 Soft closing mechanism
- 1 Set of installation instructions

Colour	Cat. No.
Light grey, RAL 7035	546.17.290

Packing: 1 or 10 pieces


Larder unit pull-out

Full extension with self and soft closing mechanisms, swivelling




- Material: Steel
- Finish/colour: Pull-out: Plastic coated, white aluminium, RAL 9006
- Load bearing capacity: 70 kg load
- Version: Height adjustable, front rails and front brackets are clipped into the hanging frame at intervals, can be swivelled to the left or right in extended position
- Internal cabinet depth: min. 500 mm
- Side panel thickness: 16 or 19 mm

Installation

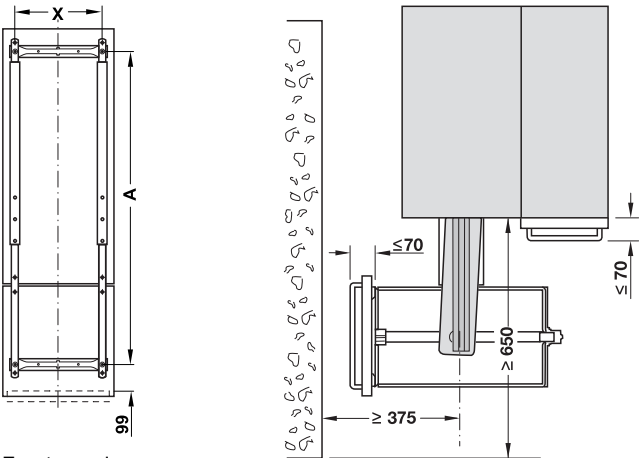

Front panel

A = outer frame dimensions – 32 mm
A = internal cabinet height – 159 mm
X = front bracket drill hole distance

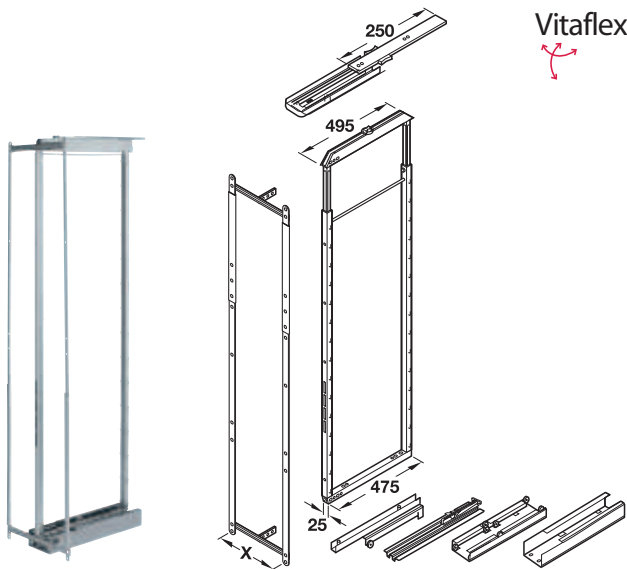

X = front bracket drill hole distance

Note

Recommended number of hanging baskets, trays and hook-in shelves:

Internal cabinet height mm	Quantity
1600 – 2000	6 – 8
2000 – 2200	7 – 9

Supplied with

- 1 Hanging frame with integrated soft closing mechanism
- 1 Bottom runner with integrated soft closing mechanism
- 1 Top runner
- 1 Set of front rails
- 1 Set of front brackets
- 1 Set of installation instructions

For cabinet width mm	Dim. X mm	Cat. No.
Internal cabinet height 1600 – 1800 mm		
300	225	546.57.931
400	325	546.57.933
Internal cabinet height 1800 – 2000 mm		
300	225	546.57.941
400	325	546.57.943
Internal cabinet height 2000 – 2200 mm		
300	225	546.57.951
400	325	546.57.953

Packing: 1 set

Order reference



Please order hanging baskets, trays and hook-in shelves separately.

Hanging basket	► FF 6.28
Hook-in shelf	► FF 6.29
Bottle holder	► FF 6.29
Front stabiliser	► FF 6.28



Larder unit pull-out


Full extension with self and soft closing mechanisms



Hook in and allow to engage






Side adjustment



Height adjustment

- Material: Steel
- Finish/colour: Pull-out: Plastic coated, white aluminium, RAL 9006
- Load bearing capacity: 100 kg load
- Version: Height adjustable, front rails and front brackets are clipped into the hanging frame at intervals, with synchronized action of rails
- Internal cabinet depth: 500 mm
- Side panel thickness: 16 or 19 mm

Installation

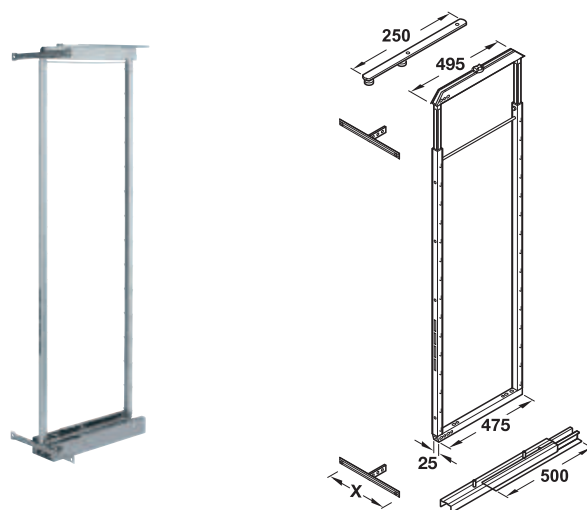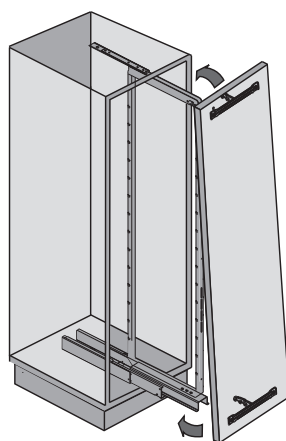

X = drill hole distance

Note

Recommended number of hanging baskets, trays and hook-in shelves:

Internal cabinet height mm	Quantity
1200 – 1600	4 – 6
1600 – 2000	6 – 8
1900 – 2300	7 – 9

Supplied with

- 1 Hanging frame with integrated soft closing mechanism
- 1 Bottom runner with integrated soft closing mechanism
- 1 Top runner
- 1 Set of front brackets, 1 set of installation instructions

For cabinet width mm	Dim. X mm	Cat. No.
Internal cabinet height 1200 – 1600 mm		
300	225	546.59.911
400	325	546.59.913
500	425	546.59.915
600	525	546.59.917
Internal cabinet height 1600 – 2000 mm		
300	225	546.59.921
400	325	546.59.923
500	425	546.59.925
600	525	546.59.927
Internal cabinet height 1900 – 2300 mm		
300	225	546.59.931
400	325	546.59.933
500	425	546.59.935
600	525	546.59.937

Packing: 1 set

Order reference



Please order hanging baskets, trays and hook-in shelves separately.

Hanging basket	► FF 6.28
Hook-in shelf	► FF 6.29
Bottle holder	► FF 6.29
Front stabiliser/ connecting strip for 2-piece front panel	► FF 6.28
Electric door opener	► FF 6.27



6




Accessories for larder unit pull-out

→ Electric door opener



- Opens by gently knocking on the cabinet front
- Retrofitting to existing cabinets possible (only with full extension and soft closing mechanism)
- Space-saving and easy installation

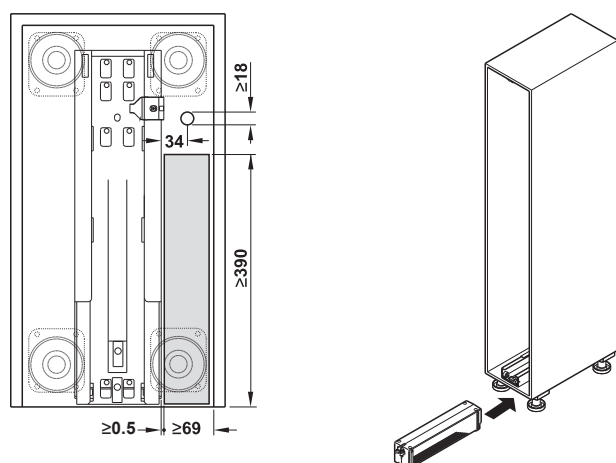

- Area of application: For larder unit pull-out
- Material: Housing: Plastic
- Colour: Pure white, RAL 9010
- Cabinet width: 300–600 mm
- Mains voltage: 110–240 V AC, 50–60 Hz
- Current consumption: 2 A
- Dim. (L x W x H): 333 x 68 x 77 mm
- Installation: Next to the bottom runner on the right hand side
- Push-out force 20–120 kg

Supplied with

- 1 Electric door opener
- 1 Mains lead 1.5 m with flat Euro plug
- 1 Set of fixing material
- 1 Set of installation instructions

	Cat. No.
Electric door opener	546.72.780


Packing: 1 piece

Order reference

The larder unit pull-out must be ordered separately.

→ Basket holder

Vitaflex

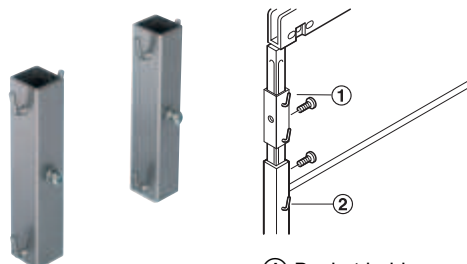

- ① Basket holder
- ② Hanging frame, bottom part

- Area of application: For use of additional baskets with hanging frame extended
- Material: Steel
- Finish/colour: Plastic coated, white aluminium, RAL 9006
- Height: 125 mm

Possible number of baskets/basket holder sets

Hanging frame mm	Installation height mm	Number of basket holder sets
1200–1600	1325–1449	1
	1450–1574	2
	1575–1600	3
1600–2000	1725–1849	1
	1850–1974	2
	1975–2000	3
1900–2300	2025–2149	1
	2150–2274	2
	2275–2300	3

	Cat. No.
Basket holder	545.84.280

Packing: 1 set

→ Replacement soft closing mechanism set



Top

Bottom

- Material: Plastic
- Colour: Tele grey 2, RAL 7046
- Installation: For clip fixing

Area of application	Cat. No.
For full extension, top and bottom	546.74.794

Packing: 1 piece

Larder unit pull-out

► FF 6.26

→ Front stabiliser



- Material: Steel
- Finish/colour: Plastic coated, white aluminium, RAL 9006
- Installation: Can be fitted anywhere to the hanging frame

Note

Does not increase the load bearing capacity.

Dim. mm	Cat. No.
160 x 28 x 20	546.76.220

Packing: 1 piece

→ Front stabiliser for frame doors



- Material: Steel
- Finish/colour: Plastic coated, white aluminium, RAL 9006

Note

Does not increase the load bearing capacity.

For cabinet width mm	Dim. mm	Cat. No.
300	251 x 30	546.76.201
400	351 x 30	546.76.210

Packing: 1 piece


→ Connecting strip for 2-piece front panel




- Material thickness: 3 mm
- Length: 230 mm

Material	Colour	Cat. No.
Steel	White aluminium, RAL 9006	260.22.200

Packing: 1 or 20 pieces



→ Hanging basket




- Material: Steel
- Finish/colour: Chrome plated or plastic coated, white aluminium, RAL 9006
- Dim.: 467 x 110 mm (D x H)

	For cabinet width mm	Width mm	Chrome plated	White aluminium, RAL 9006
	300	250	546.75.204	546.75.900
	400	350	546.75.213	546.75.910

Packing: 1 piece

Tray for hanging basket



- Area of application: For inserting into hanging basket
- Material: Plastic
- Finish: Pure white, RAL 9010
- Dim.: 442 x 12 mm (D x H)


For cabinet width mm	Width mm	Cat. No.
300	235	546.75.780
400	335	546.75.781

Packing: 1 piece



6

→ Bottle holder for hooking in




- Material: Steel
- Finish/colour: Chrome plated or plastic coated, white aluminium, RAL 9006
- Dim. (D x H): 467 x 110 mm
- Version: With fixed welded-in partitioning

	For cabinet width mm	Width	Chrome plated	white aluminium, RAL 9006
	300	Basket: 250 mm	546.75.260	546.75.960
	400	Basket: 350 mm	546.75.270	546.75.970

Packing: 1 piece

→ Hook-in shelf with non-slip effect




- Material: Railing: Steel, base: Chipboard
- Finish/colour: Railing: Chrome plated, base: White
- Dim. (D x H): Classic: 462 x 106 mm, Style: 464 x 93 mm



For cabinet width mm	Width	Classic	Style
300	Shelf: 250 mm	546.75.243	546.75.253
400	Shelf: 350 mm	546.75.244	546.75.254
450	Shelf: 400 mm	–	546.75.255
500	Shelf: 450 mm	546.75.241	546.75.256
600	Shelf: 550 mm	546.75.242	546.75.257

Packing: 1 piece

→ Shelf support for hooking in



- Area of application: For holding wooden bases with dimensions of 249 x 419 x 16 mm
- Material: Steel
- Finish: Chrome plated

For cabinet width mm	Dim. (W x D x H) mm	Cat. No.
300	250 x 460 x 124	546.75.222

Packing: 1 piece

→ Horizontal divider



- Material: Rail: Steel, fastening clips: Plastic
- Finish/colour: Rail: Chrome plated, fastening clips: Black
- Installation: For clipping into hanging baskets and hook-in shelves
- Diameter: Rail: 6.8 mm

For cabinet width mm	Width mm	Cat. No.
300	Shelf: 250	545.89.212
400	Shelf: 350	545.89.221

Packing: 1 piece

→ Transport lock




- Area of application: For securing the shelf during transport for pre-assembled cabinets
- Material: Plastic
- Installation: For clipping into hanging baskets

Colour	Cat. No.
Grey	546.75.090

Packing: 1 or 10 pieces

Larder unit pull-out

Full extension with soft extension and closing mechanisms



Vitaflex

Supplied with

- 1 Hanging profile with front fixing
- 1 Pull-out fitting
- 1 Top runner with shelf with height extension panels made of glass
- 2 Front brackets (top and bottom)

Internal cabinet height mm	Dim. A mm	Dim. B mm	Cat. No.
1100 – 1200	730	767	545.81.914
1900 – 2000	1530	1567	545.81.984
2100 – 2200	1730	1767	545.81.994

Packing: 1 set

→ Hook-in shelf with height extension panels



- Material: Hanging profile, front brackets, pull-out fitting and railing: Steel, shelf: Chipboard
- Finish/colour: Hanging profile and front brackets: Plastic coated, white aluminium, RAL 9006, pull-out fitting: Aluminium coloured, shelf: White
- For cabinet width: 450 mm
- Load bearing capacity: 100 kg load
- Type of pull-out: Full extension
- Version: Shelves with height extension panels and non-slip effect, top shelf conceals the runner, further shelves continuously height adjustable
- Internal cabinet depth: ≥ 500 mm
- Side panel thickness: 16 or 19 mm

- Material: Shelf: Chipboard, height extension panels: Glass
- Colour: Shelf: White
- For cabinet width: 450 mm
- Version: With non-slip effect, continuously height adjustable

Dim. (W x D x H) mm	Cat. No.
400 x 470 x 90	545.80.214

Packing: 1 piece


→ Front stabiliser for frame doors

- Material: Steel
- Finish/colour: Plastic coated, white aluminium, RAL 9006,

For cabinet width mm	Cat. No.
450	545.80.980

Packing: 1 piece

→ Pull-out fitting with top shelf

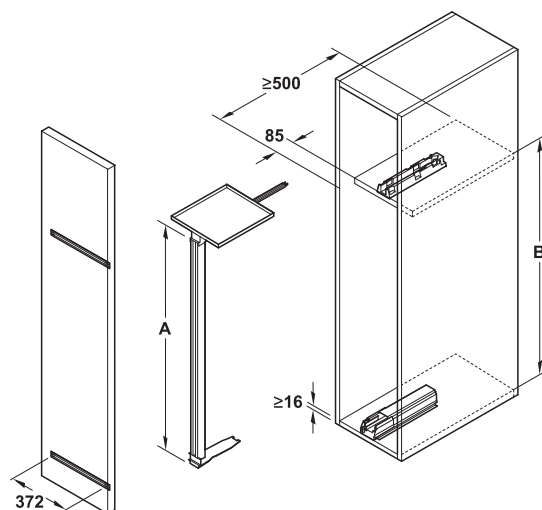


Larder unit pull-out with wire baskets


→ For installation behind fronts



Full extension installation dimensions




Front panel mounting

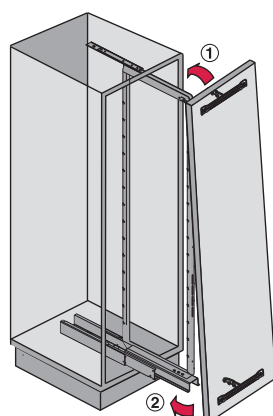

Complete set with fittings and baskets

Pull-out with 4 or 5 baskets and front stabiliser

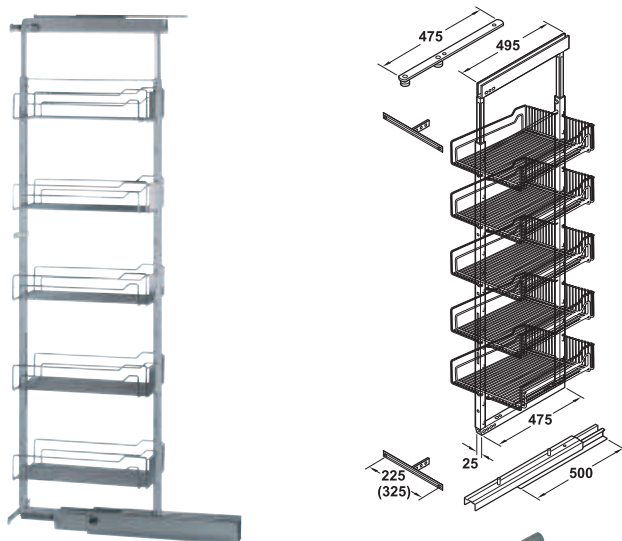

Version with 1,600 – 2,000 mm and 1,900 – 2,300 mm

Front stabiliser

- Material: Steel
- Finish: Pull-out: Plastic coated, white aluminium, RAL 9006, baskets: Chrome plated
- Load bearing capacity: 70 kg (load)
- Type of pull-out: Full extension
- Version: Adjustable height
- Internal cabinet depth: min. 500 mm
- Side panel thickness: 16 or 19 mm

Supplied with

- 1 Hanging frame
- 1 Bottom runner
- 1 Top runner
- 1 Set of front brackets
- 1 Front stabiliser
- 4 or 5 baskets
- 1 Set of installation instructions

For internal cabinet height mm		For cabinet width mm	
		300	400
1200–1600	4 hanging baskets	546.60.201	546.60.211
1600–2000	5 hanging baskets	546.60.202	546.60.212
1900–2300	5 hanging baskets	546.60.203	546.60.213

Packing: 1 piece

→ Soft closing mechanism



- Material: Plastic
- Finish/colour: Light grey, RAL 7046
- Installation: For clipping into hanging frame (no tools required)


Note

Bottom soft closing mechanism can only be used in combination with top soft closing mechanism.

Soft closing mechanism	Cat. No.
Top	546.74.790
Top and bottom	546.74.795

Packing: 1 piece

→ Hanging basket, separate



- Material: Steel
- Finish/colour: Chrome plated
- Dim. (D x H): 467 x 110 mm

Width mm	For cabinet width mm	Cat. No.
250	300	546.60.291
350	400	546.60.292

Packing: 1 piece



Corner unit half circle carousel fitting


Soft closing and self closing mechanisms



Style

Functionality

(Swivel direction right)

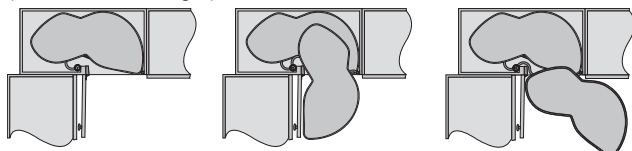

1. Cabinet door open
2. Upper or lower shelf is swivelled forwards
3. Fully swivelled out




Height adjustment and reinforcement of cabinet side panel



Soft and self closing mechanism


Installation dimensions

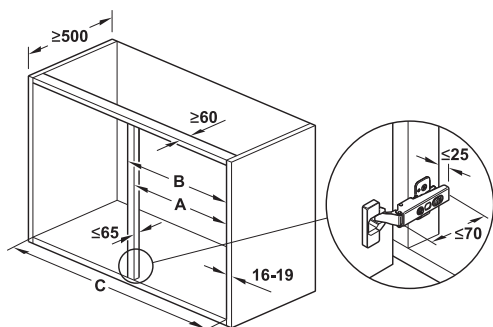

Door width mm	400	450	500	600
C = internal dim. mm	min. 764	min. 800	min. 910	min. 960
B mm	max. 400	max. 450	max. 500	max. 600
A mm	361-368	411-418	461-468	561-568

→ Shelf set With pre-mounted fitting

Vitaflex



Classic



Style

- Material: Frame: Steel, base: Coated chipboard
- Finish/colour: Railing: Chrome plated, base: White
- Version: Shelf with non-slip effect
- Load bearing capacity: 25 kg/shelf
- Door opening angle min. 85°

Supplied with

- 2 Shelves with pre-mounted fitting
- 1 Set of installation instructions



For door width mm	Swivel direction	Classic	Style
450	Right	541.30.145	541.30.147
	Left	541.30.146	541.30.148
500	Right	541.30.150	541.30.152
	Left	541.30.151	541.30.153
600	Right	541.30.160	541.30.162
	Left	541.30.161	541.30.163

Packing: 1 set

Order reference

Please order spindle and soft and self closing mechanism separately

→ Spindle, height adjustable

- Material: Steel/plastic
- Finish/colour: White



Internal cabinet height mm	Cat. No.
600 – 750	541.32.700
720 – 900	541.32.701
min. 1265	541.32.704

Packing: 1 set

→ Soft and self closing mechanism



Swivel direction	Cat. No.
Right	541.32.708
Left	541.32.709

Packing: 2 pieces


Corner unit pivoting pull-out
With soft and self closing mechanisms




Style

- Area of application: For corner base units 900 x ≥500 or 1,000 x ≥500 mm
- Version: Swivelling out to left or right
- For door width: 450–500 mm

Function and installation dimensions
(Swivel direction right)

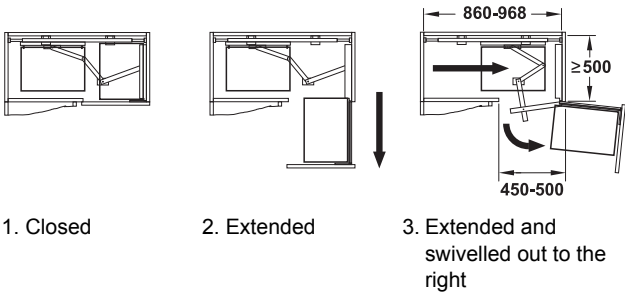

→ Pivoting pull-out fitting

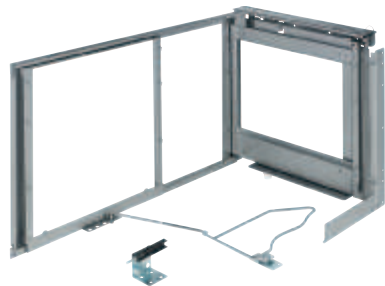

- Material: Steel
- Finish/colour: Plastic coated, white aluminium, RAL 9006, runners: Galvanized
- Version: With radial cam for guided movement
- Load bearing capacity: 14 kg/basket at front, 18 kg/basket at rear
- Installation: Front adjustment and pull-out frame installation without tools

- Supplied with**
- 1 Pivoting pull-out fitting with integrated soft closing mechanism
 - 1 Set of installation instructions


For internal cabinet height mm	Swivel direction	Cat. No.
≥525	Right	546.17.224
	Left	546.17.234

Packing: 1 piece


Basket or shelf set ▶ FF 6.34




→ Wire basket and shelf set

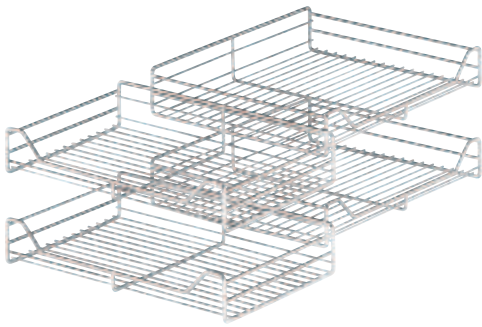

Wire basket

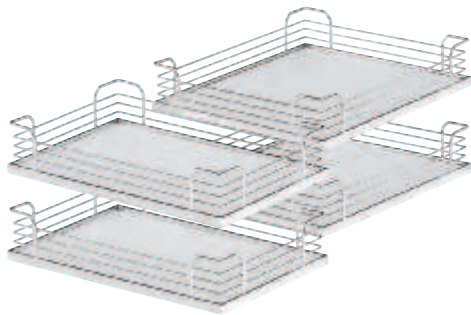

Classic

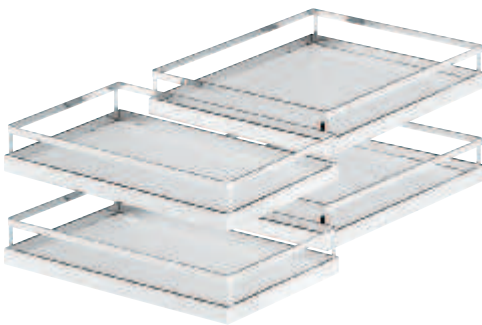

Style

- Material: Steel, shelf: Chipboard
- Finish/colour: Chrome plated or plastic coated, white aluminium, RAL 9006, shelf: White
- Version: Shelves with non-slip effect

Supplied with

Wire basket (W x D x H):

2 Baskets (295 x 470 x 85 mm) and 2 baskets (390 x 470 x 85 mm)

Classic (W x D x H):

2 Shelves (295 x 470 x 88 mm) and 2 shelves (390 x 470 x 88 mm)

Style (W x D x H):

2 Shelves (295 x 470 x 75 mm) and 2 shelves (390 x 470 x 75 mm)



Finish/colour	Wire basket	Classic	Style
Chrome plated	546.17.266	546.17.265	546.17.264
White aluminium, RAL 9006	546.17.966	—	—

Packing: 1 set



6


Corner unit pivoting pull-out with wire baskets




Swivels out to the left

Functionality

Right




Left




- Area of application: For corner base units 900 x min. 500 mm or 1,000 x min. 500 mm
- Version: Swivels out to the left or right, with radial cam for guided movement, 2 tiers
- Material: Steel
- Finish: Fitting: Plastic coated, white aluminium, RAL 9006, runners: Galvanized, hanging baskets: Chrome plated


Installation



1. Closed




2. Extended



3. Extended and swivelled out to the right



Complete fitting with baskets for maximum use of corner space.

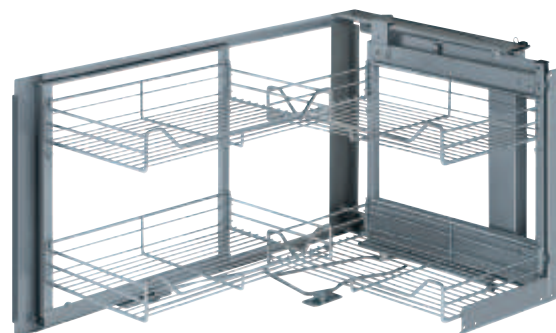

Swivels out to the right

Supplied with

- 1 Corner unit pivoting pull-out fitting
- 4 Hanging baskets, chrome plated (W x D x H): 305 x 472 x 85 mm
- 1 Set of installation instructions

Internal cabinet height mm	Internal cabinet depth mm	Internal cabinet width mm	Swivel direction	Cat. No.
min. 525	min. 500	860-970	Right	546.00.202
			Left	546.00.203

Packing: 1 piece

→ Soft closing mechanism for corner unit pivoting pull-out



- Material: Plastic

Supplied with

- 1 Soft closing mechanism
- 1 Set of installation instructions


Colour	Cat. No.
Light grey, RAL 7035	546.17.290

Packing: 1 or 10 pieces

Corner unit half circle carousel set



Functionality
(Swivel direction right)




White/silver coloured lacquered

- Material: Fitting: Aluminium, carousel shelf: Plastic
- Finish: Fitting: Plastic coated
- Version: With concealed dynamic runners, shelves can easily be removed, spindle can be shortened
- Internal cabinet depth: ≥ 500 mm
- Internal installation height: 685 – 745 mm
- Installation: On post (no external cabinet connection)
- Load bearing capacity: 20 kg/carousel shelf

Supplied with

- 2 Carousel shelves
- 1 Fitting set
- 1 Spindle with telescopic sleeve (640 mm)
- 1 Set of installation instructions

Installation dimensions

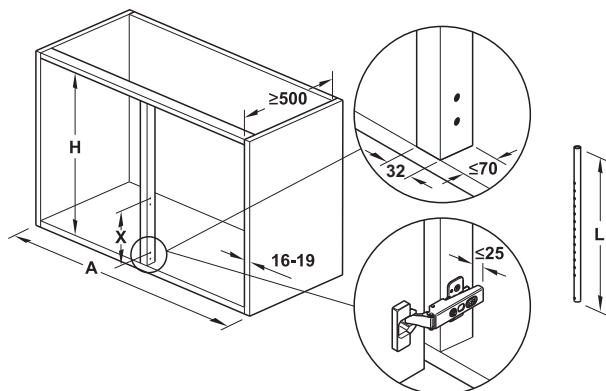

X = possible distances between carousel shelves

Door width mm	450	500	600
A mm	900	1000	1200
H mm	685–745		
L mm	640		
X mm	224, 256, 288, 320, 352 or 384		

Shelf dimensions

Door width mm	450	500	600
L x W x H mm	847 x 395 x 64	940 x 452 x 64	1029 x 448 x 64

→ Aluminium grey,
with non-slip effect

Vitaflex



- Colour: Carousel shelf: Aluminium grey

For door width mm	For cabinet width mm	Swivel direction	Cat. No.
450	900	Right	541.55.540
		Left	541.55.541
500	1000	Right	541.55.542
		Left	541.55.543
600	1200	Right	541.55.544
		Left	541.55.545

Packing: 1 set

→ White/silver colour lacquered



- Colour: Carousel shelf: White, edge: Silver colour lacquered, keder effect: Aluminium

For door width mm	For cabinet width mm	Swivel direction	Cat. No.
450	900	Right	541.55.740
		Left	541.55.741
500	1000	Right	541.55.742
		Left	541.55.743
600	1200	Right	541.55.744
		Left	541.55.745

Packing: 1 set

Three quarter circle carousel fitting

90° doors




Style

→ Carousel fitting

- Material: Steel
- Finish/colour: Plastic coated, white aluminium, RAL 9006
- Version: Height adjustable spindle, soft closing
- Installation: Spindle with quick-action lock, installation to doors with quick-fixing system (plug-fit connection)
- Load bearing capacity: ≤20 kg/shelf



Shelves continuously height adjustable, up to 3 shelves can be retrofitted.

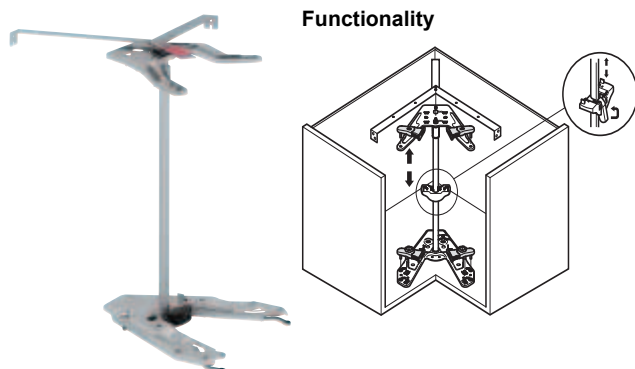


Supplied with

- 1 Upper bearing bracket
- 1 Basic fitting unit
- 1 Carousel shelf support
- 1 Set of fixing material
- 1 Set of installation instructions

Area of application	Internal installation height	
	660–860 mm	740–940 mm
For 90° doors	541.46.900	541.46.901

Packing: 1 set

→ Three quarter circle carousel shelf 90°

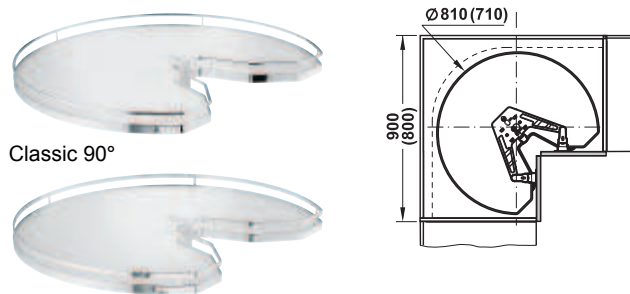

Classic 90°

Style 90°

- Material: Surrounds: Steel, carousel shelves: Wood
- Finish/colour: Surrounds: Chrome plated, carousel shelves: White
- Version: Carousel shelf with non-slip effect
- Load bearing capacity: ≤20 kg/shelf



For base unit mm	Diameter mm	Area of application	Classic	Style
800 x 800	710	For 90° doors	541.46.283	541.46.285
900 x 900	810	For 90° doors	541.46.293	541.46.295

Packing: 1 piece

Three quarter circle wire carousel	► FF 6.38
Three quarter circle carousel shelf, plastic	► FF 6.39

→ Carousel shelf support

Note

One carousel shelf support is needed for each carousel shelf. The lowermost shelf does not require a carousel shelf support.

	Cat. No.
Carousel shelf support 90°	541.46.267


Packing: 1 piece



6

Kitchen Cabinet Fittings


Corner unit pivoting pull-out

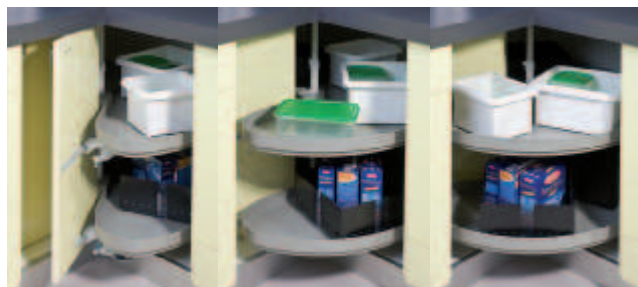


→ Carousel fitting

- Area of application: For 800 x 800 mm and 900 x 900 mm corner units
- Material: Steel
- Finish/colour: Plastic coated, light grey, RAL 7035
- Version: Soft closing, 3D adjustment
- Internal installation height: 635–800 mm
- Variable cabinet depth dimensions

Installation dimensions



Base unit 800 x 800 mm



Base unit 900 x 900 mm



Ease of installation

No tools required for adjusting the spring force of the doors.
Easy adjustment also after installation.

Supplied with

- 1 Carousel fitting with telescopic function
- 1 Bearing bracket for different cabinet side depths
- 4 Door fittings with adjustment facility
- 1 Set of installation instructions

	Cat. No.
Carousel fitting	541.37.700


Packing: 1 set

→ Three quarter circle wire carousel




- Material: Steel
- Finish: Chrome plated

Installation dimensions



Base unit 800 x 800 mm



Base unit 900 x 900 mm

Note

Installation with two pre-mounted screws.

For base unit mm	Diameter mm	Cat. No.
800 x 800	700	541.11.224
900 x 900	800	541.11.234


Packing: 1 piece

→ Three-quarter circle carousel shelf

With non-slip effect



Installation dimensions



- Material: Surrounds: Steel, carousel shelves: Wood
- Finish: Surrounds: Chrome plated, carousel shelves: White



For base unit mm	Diameter mm	Classic	Style
800 x 800	710	541.46.283	541.46.285
900 x 900	810	541.46.293	541.46.295

Packing: 1 piece

Three quarter circle carousel shelf, plastic

► FF 6.39

→ Three quarter circle carousel shelf



- Material: Plastic (extremely impact resistant)
- Colour: Silver coloured
- Version: Carousel shelf with non-slip effect and edge profile

For base unit mm	Diameter mm	Cat. No.
800 x 800	710	542.16.242
900 x 900	810	542.16.243

Packing: 1 or 2 pieces

Three quarter circle carousel fitting with cabinet

For continuous doors



The doors only have to be manufactured ... and the cabinet is ready for installation.

- Material: Carousel shelves: Plastic
- Colour: Corner base unit: White outside, grey inside, carousel shelves: Silver coloured
- Version: Fitting with entire guide mechanism and soft closing mechanism, carousel shelves with non-slip effect, plinth adapter can be cut to size
- Adjustment facility: Lowering: 3.5 mm, 3-dimensional
- Installation: Quick fixing system for doors



Supplied with

- 1 Pre-assembled corner base unit with 2 three quarter circle carousel shelves
- 1 Door rail set for 90° angled door with plinth adapter
- 7 Plinth feet (height 100 mm)
- 1 Set of installation instructions

Suitable for	Side height mm	
	720	760
Corner base unit 800 x 800 mm	542.23.267	542.23.269
Corner base unit 900 x 900 mm	542.23.277	542.23.279

Packing: 1 piece

Installation dimensions



Three quarter circle carousel fitting

- Version: For max. 2 carousel shelves
- Functionality: Carousel shelves rotate together with the centre spindle, brake cams synchronously lock the three quarter circle carousel shelves in the closed position

→ Spindle



- Material: Spindle: Steel, bearing components: Plastic
- Finish/colour: Spindle: Chrome plated, bearing components: White
- Version: With brake, height adjustable

Supplied with

- 1 Spindle with multiple perforations, Ø 25 mm
- 1 Lower bearing with latching plate, adjusting journal, brake cams
- 1 Top bearing plate with telescopic sleeve
- 2 Pins

Height mm	Spindle length mm	Cat. No.
652 – 717	620	541.47.723

Packing: 1 or 10 sets



6

Kitchen Cabinet Fittings


→ Three quarter circle carousel shelf

For corner base unit 800 x 800 mm



- Area of application: For overlay doors
- Material: Plastic (extremely impact resistant)
- Version: Double-walled
- Load bearing capacity: max. 20 kg

Installation dimensions

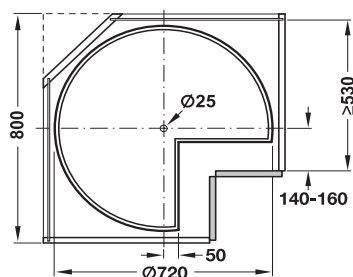

Colour	Cat. No.
White	541.40.751

Packing: 1 or 10 pieces


→ Three quarter circle carousel shelf

For corner base unit 900 x 900 mm



- Area of application: For continuous doors
- Material: Plastic (extremely impact resistant)
- Version: With fixing holes for door, double-walled
- Load bearing capacity: max. 25 kg

Installation dimensions

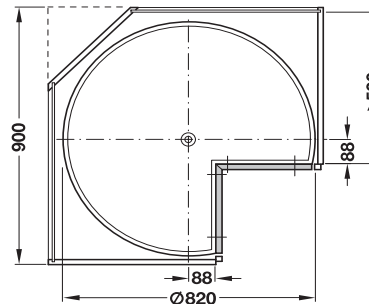

Colour	Cat. No.
White	541.45.765

Packing: 1 or 10 pieces